




Grows with the requirements

Frugal mold


Frugal innovation offers good performance without any compromise on quality

Advantages

- Low invest – efficient production
- Grows with your business
- No compromise on preform quality
- For all standard injection molding machines on the market
- Easy maintenance and conversion
- Flexible use
- Proven MHT technology

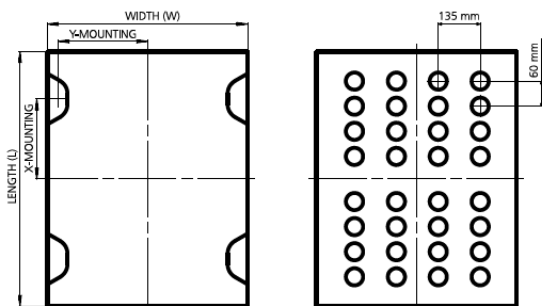Ejector and mounting EUROMAP 2



Cavities	Pitch	Thread diameter	Clamping force
24	60 x 135	max. 38 mm	800 kN
32			1.100 kN
48			1.500 kN

Cavities	Mold length (L)	Mold width (W)	Sprue bushing diamter (SD)	Hotrunner zones
24	860 mm	446 mm	9 mm	8
32	860 mm	560 mm	12 mm	9
48	1.100 mm	560 mm	16 mm	10